


MATEN[®]

**LOGO
MATS**



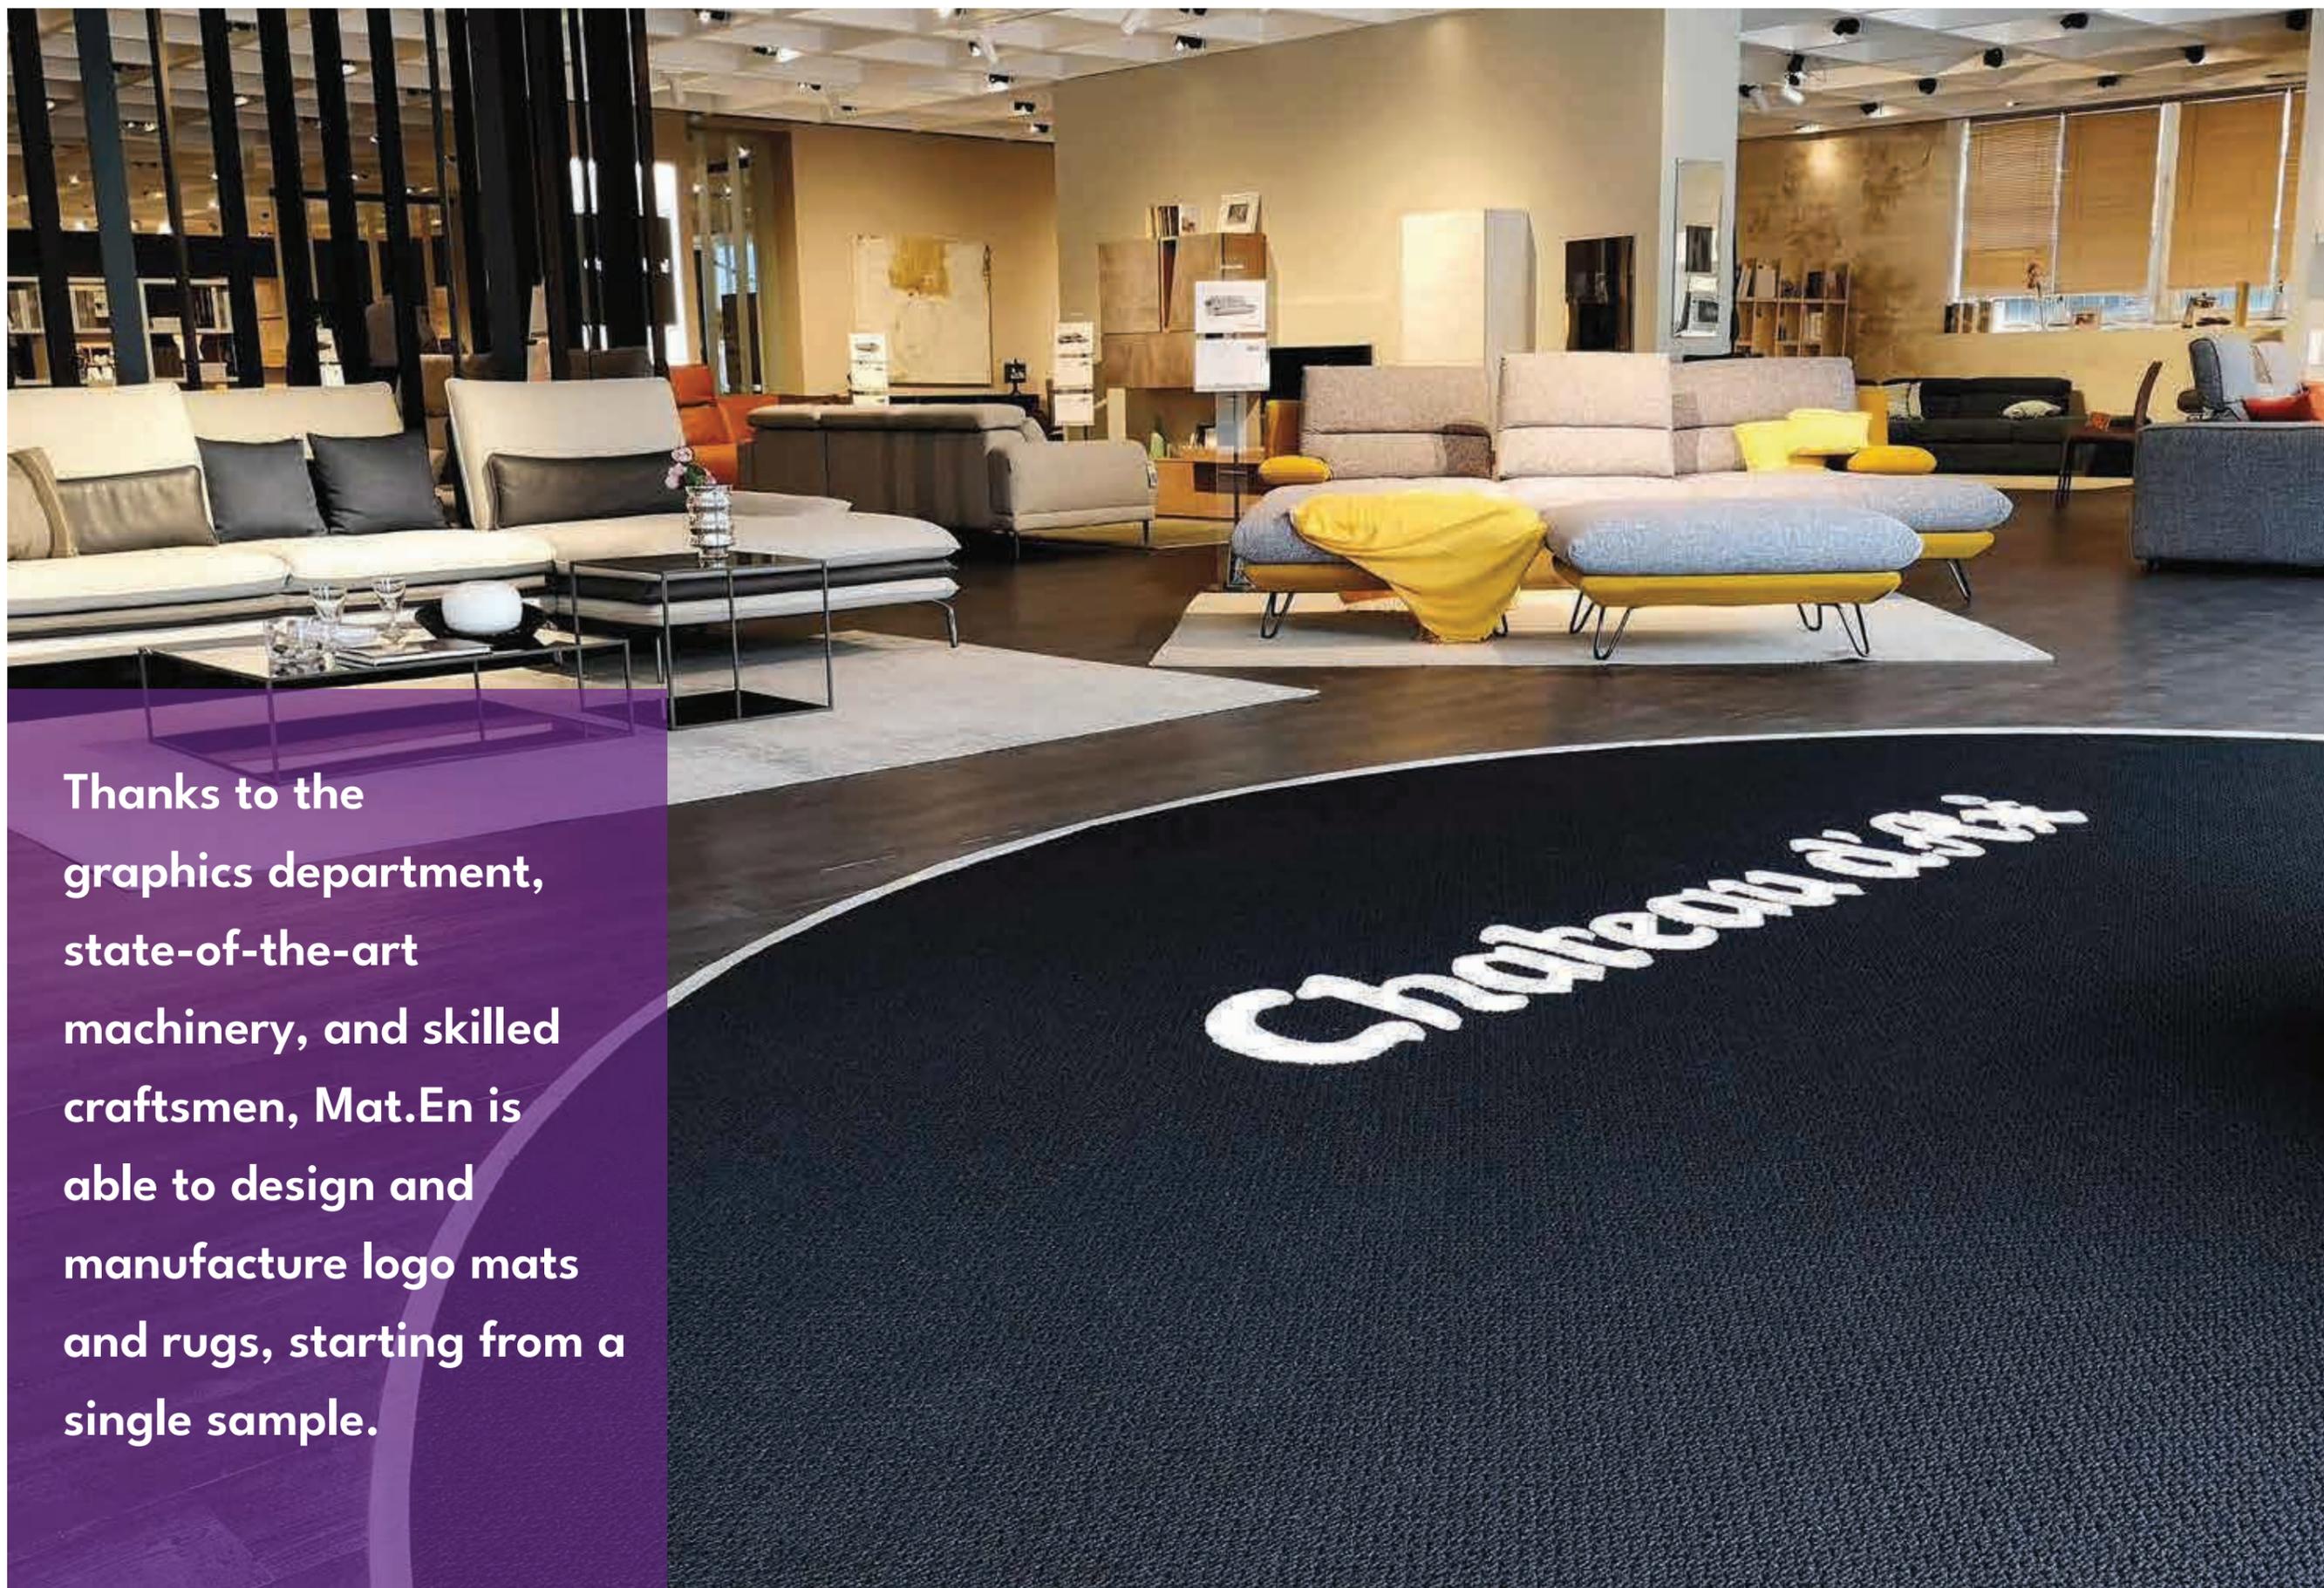

Thanks to the graphics department, state-of-the-art machinery, and skilled craftsmen, Mat.En is able to design and manufacture logo mats and rugs, starting from a single sample.

Our solutions



01

- ▶ RI.VI
- ▶ GRATE

FIRST CLEANING

If you plan to place the mat in an outdoor area exposed to rain and snow, or if you need to prepare the sole for a later drying the most suitable items belong to this category. These are in fact mats perfect for outdoor, with a good scraping power and an excellent drainage capacity of water and dirt.

02

- ▶ VELLUTO
- ▶ ARAN
- ▶ KIKO
- ▶ CUSTOM SYNTHETIC COIR
- ▶ NATURAL COIR

CLEANING AND DRYING

For indoor or covered outdoor use these mats allow to clean and dry the sole at the same time.

ACCESSORIES

03

- ▶ BASIC PERSONALIZZATO
- ▶ SUPER PERSONALIZZATO

DEEP DRYING

Articles exclusively designed for indoor use and to face with wet but clean soles, perform (depending on the model) a deep and intense drying of the sole.

Ri.Vi

► Customizable (inlayed)



The dense texture the thick curl make effective the scraping action.

The open mesh structure allows the draining of: water, dirt, sand...

The bright colours make it perfect for reproducing logos or graphics or for adding personality to an entrance. Its ideal use is in covered or uncovered outdoor for a great cleaning of the soles before an internal drying area.

You can place it in the hole or on holds, equipped with the special pvc edge also applicable on curved sides.

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.

► Thickness ±14 mm



Color Range



Synthetic Coir

Grate

► Customizable (inlayed) with: VELLUTO - ARAN - KIKO



Product derived from synthetic turf, with this it shares on the back the presence of holes for water drainage while the fleece in scraping monofilament performs an excellent cleaning of the sole preparing it to a subsequent drying.

Grate is customizable using the Velluto's wide colour range for the logos and inscriptions' inlay. You can place it in the hole or on holds, equipped with the special pvc edge also applicable on curved sides.

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.

► Thickness ±14 mm (12 mm on request)



Color Range



Synthetic Coir

Velluto

► Customizable (inlaid) with:
GRATE - ARAN - KIKO



Synthetic coir Velluto mats offer an elegant look with and excellent cleaning action and of first drying. The 100% synthetic fiber with properties of resistance to UV rays, makes them perfect for indoor and covered and uncovered outdoor even when exposed to direct sunlight, while the backing in natural rubber gives him the best anti-slip property in addition to an excellent dimensional stability and the best loose-lay performance. Thanks to the wide range of colours is customized through accurate inlay technique also in combination with Aran to add scraping power, or with Grate, for an outside placement. You can place it in the hole or on holds, equipped with the special pvc edge also applicable on curved sides.


► Thickness ±14 mm (12 mm on request)

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.



Color Range

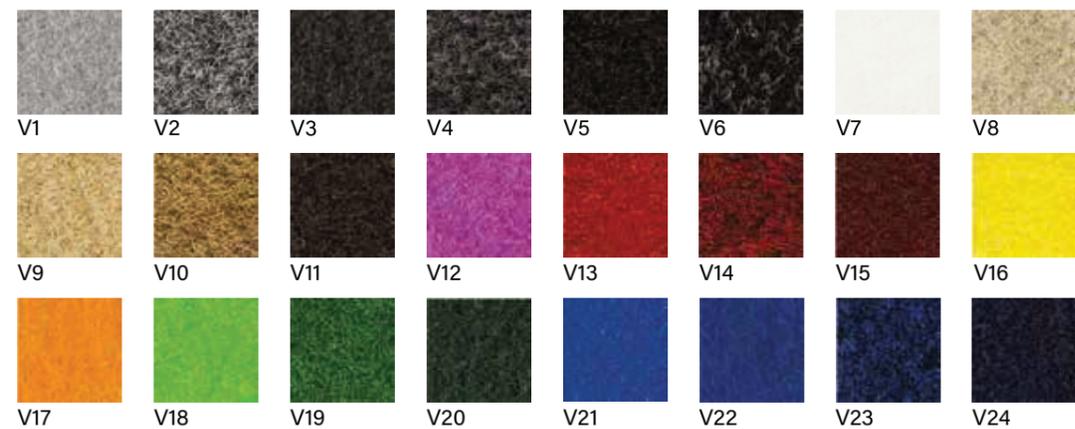

Synthetic Coir

Aran

► Customizable (inlaid) with:
GRATE - VELLUTO - KIKO



The synthetic coir Aran offers a worked looking, ensuring an excellent scraping action and first drying. The 100% synthetic fiber with properties of resistance to UV rays makes them perfect for interior and covered outdoor even when exposed to sunlight, while the natural rubber backing gives it the best anti-slip property in addition to excellent dimensional stability and a better self-laying performance. Aran synthetic coir is also inlayable with Velluto synthetic coir, whose wide range of colours can be used for logos and lettering with a strong impact. You can place it in the hole or on holds, equipped with the special pvc edge also applicable on curved sides.


► Thickness ±14 mm (12 mm on request)

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.



Color Range

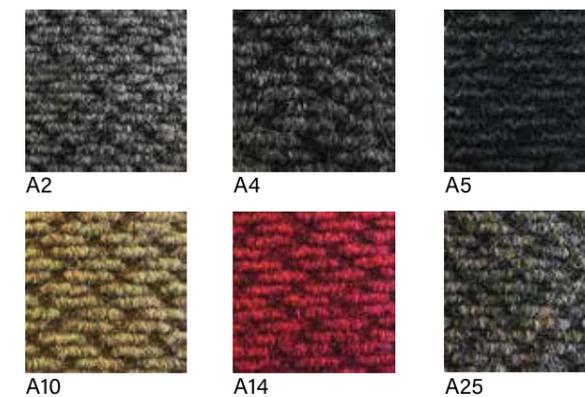

Synthetic Coir

Kiko

► Customizable (inlaid) with:
GRATE - VELLUTO - ARAN



Synthetic coir Kiko mats are characterized by rice-grain looking and offer an extreme resistance (class 33 certified), with an excellent cleaning and drying action. The 100% synthetic fiber with properties of resistance to UV rays makes them perfect for interior and covered outdoor, even when exposed to sunlight, while the natural rubber backing gives it the best anti-slip property, in addition to an excellent dimensional stability and the best self-laying performance. It can be placed in holes or on hold, supplied with special pvc edge, also applicable on curved sides.

► Thickness ±14 mm (12 mm on request)

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.



Color Range



Cocco Sintetico mix



Logo mats in needle-punched Velluto, Aran, Kiko, Grate matchable (with each other) between them, through accurate inlay technique.

The thickness correspondence between the various products (Velvet, Aran, Kiko and Grate) allows all these different finishes to be combined.


- Velluto: wide range of colours, smooth surface for maximum precision inlaying and better definition.
- Aran: textured appearance for better scraping power and initial drying.
- Kiko: special, super-bright colours, rice grain texture for maximum strength.
- Grate: derived from synthetic grass, ideal for uncovered outdoor areas.

It makes the most of all potential and the colour palette of Mat.En synthetic mats for a unique and customized entrance.

► Thickness ±14 mm (12 mm on request)

Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.

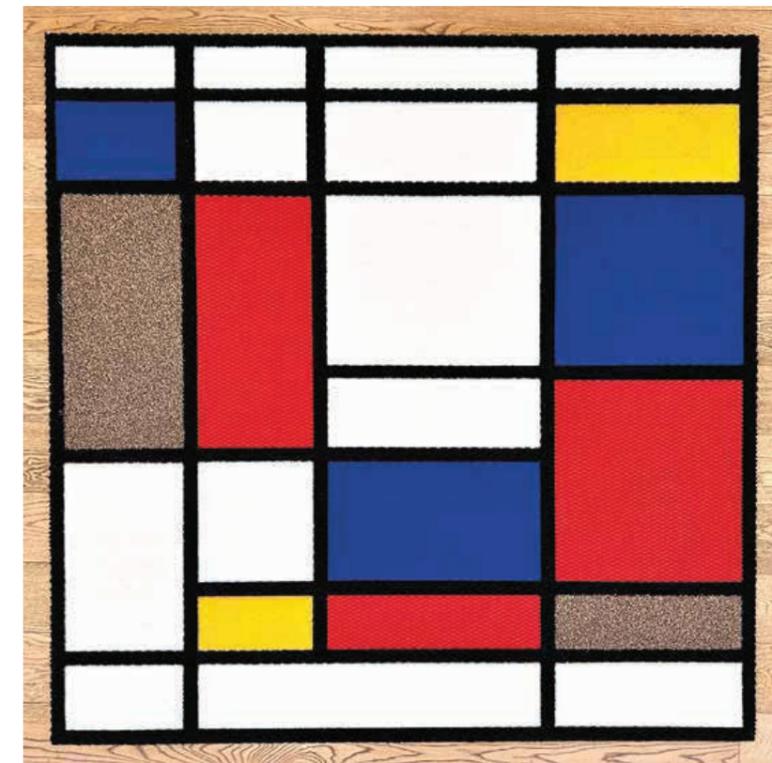

Natural Coir

► Customizable (inlayed) with:
Only for the 17mm version.



The classic of the mats world is the natural coir mat, which Mat.En suggests in 17 mm thickness. The backing is in PVC while the fiber is 100% natural, made from coconut palm and untreated.

The particular roughness of this fiber provide a very good scraping action. It can be embedded to the wall or supported, with or without aluminium anti-stumbling containment edge (even anodized for a better appearance). The inlayed customization is made by choosing between the colors of the range which are all dyed before weaving resulting very long-lasting compared to the post-production painting.


► Thickness ±17 mm



Accessories

- Containment frame in: aluminium, steel and brass.
- Anodized aluminium wire cover.
- PVC trailerable anti-stumbling edge.
- Foam mat 5 and 10mm.


Color Range

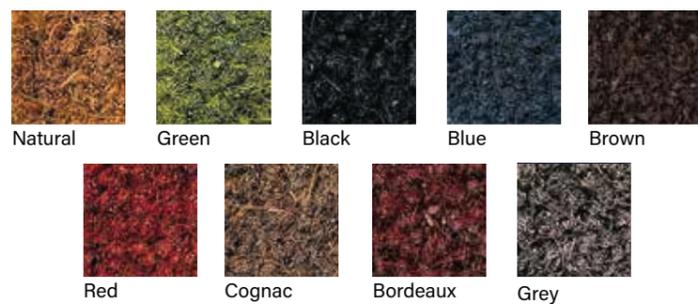

Accessories


► PVC Edge

The PVC edge are applied directly at the backing of the doormat. Their softness allows to maintain the carpet roll-up and to be applied not only on straight sides but also curved. Thanks to its slope according to low are suitable for: strollers, people with disabilities and trolleys.

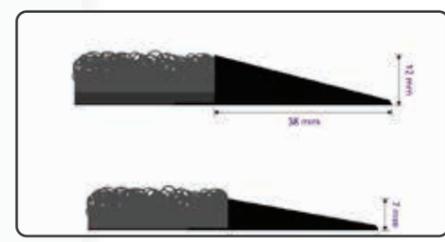


► Mattress

The mattress allows to shim the holes in which the mats will be added. They are available in 5 and 10mm thickness and can be supported in the cockpit before lay the mat or be glued to the carpet becoming a single body.

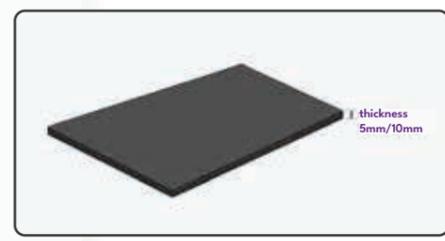


► Transition profile

The finishing-lists are the ideal solution to hide the cut of the flooring and create a frame to any type and material mat.

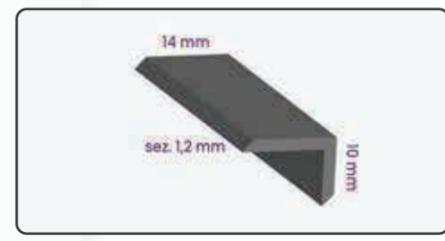

► Containment Frames

The frames are available in: aluminium, stainless steel and brass and are the ideal accomodation for all Mat.en recessed mats. Thanks to our interior carpentry circular shapes are also realizable or as directed by the customer.

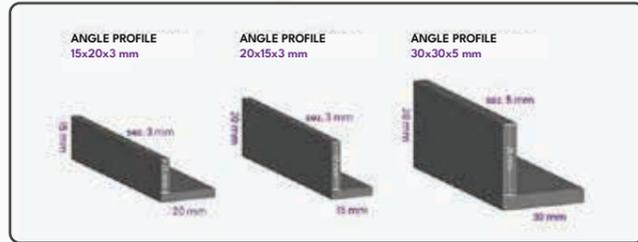

► Cleaning Products

From a collaboration with a market leader in the production of hygiene products, the cleaning and our technicians, are born the new technical and sanitizing degreaser. Supplied in convenient dispensers, have been designed to sanitize and deep clean without deteriorating the fleece of the Mat.en's carpets.



Basic Personalizzato



► Customizable (digital printing)

Doormat for domestic use or small shops with black vinyl trim of 2.5 cm width.

Available in three sizes and printed through four-colour printing technique on a thick, richly textured fleece for a better printing definition.

Available sizes

- 90 cm X 65 cm
- 150 cm X 95 cm
- 190 cm X 140 cm

► Thickness: ± 5 mm



Super Personalizzato



► Customizable (print)

The Super Personalizzato doormat is the main alternative to inlaid doormats. Printing with Chromojet technology allows the ink to penetrate the yarn, making it permanent and resistant even to machine washing. Its low thickness, high capacity for drying liquids, rubber edging on all four sides (always included with the mat), and the ability to faithfully reproduce even very complex logos (which cannot be achieved with inlay) make it the perfect solution for those who do not have a drain or are looking for a super-absorbent personalizzato mat.

► Thickness ±8 mm



Color Range



Sampling



Mat.En's sample dedicated to customized mats allows you to see and feel all the available models for yourself, appreciating: their sturdiness, their thickness and overall the actual colour palette, which displayed on the monitor can be misleadingly perceived.

Come and visit our showroom or our stand in the most important international trade fairs.

WARNING: all mats are hand-made so, despite the utmost care and all necessary checks during production and before shipment, they are subject to dimensional tolerance due to: intrinsic properties of the material, customization methods, and possible uses of adhesives.



Tips for proper file preparation for the processing of Logo mats.

INLAID:

- ▶ Files must be forwarded in vector pdf format (ai), eps or JPG/PNG with high resolution (minimum 150 dpi) and 1:1 scale (real size).
- ▶ The graphic must have a minimum distance margin of 2cm from all sides (4cm recommended).
- ▶ Transparency effects, gradients or spot shades cannot be reproduced. This article is inlaid not printed. We invite you to request the sampling/data sheet of the product for the decision of the chromatic choice.
- ▶ All the details must have the minimum size for processing, including spaces between letters and eyelets:
 - 7-8 mm for the synthetic coir and Grate articles
 - 10-12mm for the Ri.Vi articles
 - 10-12mm for the natural coir articles
- ▶ The completed path must be composed as few points as possible in order that the blade of the cutting plotter can flow in a fluid way (otherwise it would risk jamming and breaking) long series of close anchor points risk compromising the success of the mat.
- ▶ Fonts must be embedded and transformed into paths, as well as the lines, the forms and texts to which points have been assigned to the track to make them thicker.
- ▶ All paths must be closed and possibly non overlapping.

PRINTED (Super Personalizzato):

- ▶ Files must be forwarded in vector pdf format (ai), eps or JPG/PNG with high resolution (minimum 300 dpi) and 1:1 scale (real size). The files generated with Photoshop must be exported in one level in TIFF, JPG, BMP, PSD format taking care to not include cut marks or registration marks.
- ▶ The graphic must have a minimum distance margin of 4cm from all sides.
- ▶ For prints of logos rely on the data sheet/sample of product for the color choice because it is not possible to print spot color and Pantone color.
- ▶ For the full carpet printing files will be managed as raster images and we invite you to consider a tolerance of +/- 3% to which this product is subject for the calculation of the margin. In this case it's not possible to ask for the change of colors because the file is converted into a single photo image.
- ▶ Texts and logos must have a minimum dimension suitable for good print output (at least 5-6mm, recommended 8mm).
- ▶ Fonts must be embedded and transformed into paths, as well as the lines, the forms and texts to which points have been assigned to the track to make them thicker.
- ▶ In case of vector file all paths must be closed, paying attention to the nuances and transparency that during printing will be converted into raster images.
- * For files not suitable, our graphics department is available for the correction or the creation of the graphic.
- * The processing will be based on our graphic draft that will be sent to you within 24/48h from receiving the file.
- * The colors displayed on the monitor do not correspond to the actual colors of the mat, please always refer to the colors of the sample.



Architect@Work (Turin)



PTE - Promotiontrade Exhibition (Milan)



PSI (Düsseldorf)



VISCOM (Milan)



Made Expo (Milan)

Follow us on Instagram!

 @mat.en_srl



Hospitality (Riva del Garda)



Issa Pulire (Milan)

THE STRENGTH OF TRADITION, THE COURAGE OF INNOVATION

IG:mat.en_srl || info@mat-en.com || www.mat-en.com



Aderente ad AIB

